


CERTIFICATE OF TRANSLATION

I, Masahiko IWAMA of Shoyu-Kaikan, 3-3-1,
Kasumigaseki, Chiyoda-ku, Tokyo 100-0013 JAPAN,
hereby declare that I am the translator of
Japanese Patent Application Number


P2003-080154 filed on March 24, 2003

and certify that the following is a true
translation to the best of my knowledge and
belief.

Dated April 11, 2005

A handwritten signature in cursive script, reading "Masahiko Iwama", written in dark ink.

Masahiko IWAMA



[NAME OF THE DOCUMENT] SPECIFICATION

[TITLE OF THE INVENTION] POSITION CALCULATING METHOD,
SIGNAL RECEIVER, AND POSITION CALCULATING APPARATUS
THEREFOR

5 [CLAIMS]

[CLAIM1]

 A position calculating method of measuring reception
timings of signals transmitted and received between a base
station and a mobile station and calculating the position
10 of the mobile station by using the reception timings and
position of the base station, comprising the steps of:

 obtaining address information items necessary to
specify incoming signals used for the position calculation;

 analyzing the address information items included in
15 the incoming signals; and

 selecting incoming signals used for position
calculation in accordance with a result of comparing the
obtained address information items with the address
information items analyzed in accordance with the incoming
20 signals.

[CLAIM2]

 The position calculating method according to claim 1,
wherein

 the base station;

measures reception timings of signals incoming from the mobile station,

analyzes the destination information and/or source information included in the incoming signals as the address
5 information items, and

selects incoming signals used for position calculation in accordance with a result of comparing the obtained address information items with the destination information and/or source information analyzed in
10 accordance with the incoming signals.

[CLAIM3]

The position calculating method according to claim 1, wherein

the base station;
15 measures reception timings of signals incoming from the mobile station,

accumulates the incoming signals,
analyzes the address information items included in the incoming signals, and

20 selects the accumulated incoming signals by using the address information items.

[CLAIM4]

The position calculating method according to claim 3, wherein

incoming signals are selected by using the order in which the incoming signals are accumulated and the order in which the address information items are analyzed and thereby relating the accumulated incoming signals with the address information items.

[CLAIM5]

The position calculating method according to claim 3, wherein

incoming signals are selected by using the reception timings of the incoming signals and times when the address information items are analyzed and thereby relating the accumulated incoming signals with the address information items.

[CLAIM6]

The position calculating method according to claim 1, wherein

the mobile station;

measures reception timings of signals incoming from the base station,

accumulates the incoming signals,

analyzes the address information items included in the incoming signals, and

selects the accumulated incoming signals by using the address information items.

[CLAIM7]

The position calculating method according to claim 6,
wherein

incoming signals are selected by using the order in
which the incoming signals are accumulated and the order in
5 which the address information items are analyzed and thereby
relating the accumulated incoming signals with the address
information items.

[CLAIM8]

The position calculating method according to claim 6,
10 wherein

incoming signals are selected by using reception
timings of the incoming signals and times when the address
information items are analyzed and thereby relating the
accumulated incoming signals with the address information
15 items.

[CLAIM9]

The position calculating method according to claim 1,
wherein

the address information items use MAC addresses.

20 [CALIM10]

A receiver for receiving a signal transmitted from a
mobile station in order to calculate the position of the
mobile station by using the reception timing and reception
position of the signal transmitted from the mobile station,
25 comprising:

reception timing measurement unit for measuring the reception timing of the signal incoming from the mobile station;

information obtainment unit for obtaining the address
5 information items necessary to specify incoming signals used for the position calculation;

storage unit for storing the incoming signals;

address information analysis unit for analyzing the address information items included in the incoming signals;
10 and

control unit for selecting incoming signals used for position calculation in accordance with a result of comparing the obtained address information items with the address information items analyzed in accordance with the
15 incoming signals.

[CLAIM11]

The receiver according to claim 10, wherein
the information analysis unit analyzes the destination information and/or source information included
20 in the incoming signals as the address information items, and

the control unit selects incoming signals used for position calculation in accordance with a result of comparing the obtained address information items with the

destination information and/or source information analyzed in accordance with the incoming signals.

[CLAIM12]

The receiver according to claim 10, wherein
5 the receiver includes storage unit for storing the incoming signals, and

the control unit selects the stored incoming signals by using the analyzed address information items.

[CLAIM13]

10 The receiver according to claim 12, wherein
the control unit selects incoming signals by using the order in which the incoming signals are stored in the storage unit and the order in which the address information items are analyzed and thereby relating the stored incoming
15 signals with the address information items.

[CLAIM14]

The receiver according to claim 12, wherein
the control unit selects incoming signals by using reception timings of the incoming signals and the time when
20 the address information items are analyzed and relating the stored incoming signals with the address information items.

[CLAIM15]

A position calculating apparatus for calculating the position of a mobile station by using reception timings and

reception positions of signals transmitted and received
between a base station and the mobile station, wherein

the address information items necessary to specify
incoming signals used for the position calculation are

5 communicated to the base station and/or mobile station.

[DETAILED DESCRIPTION OF THE INVENTION]

[0001]

[FIELD OF THE INVENTION]

The present invention relates to a position
10 calculating method, a receiver, and a position calculating
apparatus for calculating the position of a mobile station
by using a radio signal.

[0002]

[BACKGROUND OF THE INVENTION]

15 For a wireless LAN system, a GPS (Global Positioning
System) or a system using a base station or CS-D (Cell
Station ID) is proposed. Though the former system makes it
possible to detect the position of a mobile station at a high
accuracy of approx. 10 m, a mobile station must have a GPS
20 receiver. Though the latter system does not require a GPS
receiver, it is impossible to obtain only an accuracy of an
arrangement interval or so between base stations in order
to obtain the position of the nearest mobile station at which
received power is maximized for a mobile station in
25 accordance with the CD-ID of the nearest base station.

[0003]

[PATENT DOCUMENT 1]

Japanese Patent Laid-Open JP 2000-156882 A

[0004]

5 [TECHNICAL PROBLEM TO BE SOLVED BY THE INVENTION]

To perform positioning according to the trilateration using a radio signal, at least three base stations around a mobile station obtains a propagation time difference from the reception time of a signal sent from the mobile station
10 to calculate the position of the mobile station. Moreover, the three base stations mutually receive signals to correct time shifts between the base stations. A signal may be received from a station other than a desired mobile station or a desired base station (for example, from the base station
15 10 in FIG. 1 or mobile station 201 in FIG. 13) in a channel for performing positioning. In this case, for example, when misidentifying a signal 15 received from a station other than a desired mobile station as a signal incoming from a mobile station whose position must be obtained and using the
20 signal 15 for position calculation, it is impossible to calculate a correct position.

[0005]

In the case of the wireless LAN system, a businessman or an individual can optionally set a base station and freely
25 move a mobile station. Therefore, not all radio stations

are incorporated into and controlled by a system for performing position calculation and it is difficult to perform the control for stopping transmission of every signal unnecessary for position calculation. Therefore, it is necessary to select a desired signal out of many signals transmitted and received between a base station and a mobile station and use the signal for positioning.

[0006]

[MEANS OF SOLVING THE PROBLEM]

10 The first aspect of the present invention is a position calculating method of measuring the reception timing of a signal transmitted and received between a base station and a mobile station and calculating the position of the mobile station by using the reception timing and the reception position of the signal, which obtains the address information items necessary to specify incoming signals used for the position calculation, analyzes the address information items included in the incoming signals, and selects incoming signals used for position calculation in accordance with a result of comparing the obtained address information items with the address information items analyzed in accordance with the incoming signals.

[0007]

25 The second aspect of the present invention is a receiver for receiving signals transmitted from a mobile

station in order to calculate the position of the mobile station by using reception timings and reception positions of the signals, which comprises information obtainment unit for obtaining the address information items necessary to specify incoming signals used for the position calculation, storage unit for storing the incoming signals, address information analysis unit for analyzing the address information items included in the incoming signals, and control unit for selecting incoming signals used for position calculation in accordance with a result of comparing the obtained address information items with the address information items analyzed in accordance with the incoming signals.

[0008]

Third aspect of the present invention is a position calculating apparatus for calculating the position of a mobile station by using reception timings and reception positions of signals transmitted and received between a base station and the mobile station, which communicates the address information items necessary to specify incoming signals used for the position calculation to the base station and/or mobile station.

[0009]

[EFFECT OF THE INVENTION]

The present invention obtains the address information items necessary to specify incoming signals used for position calculation, analyzes the address information items included in the incoming signals, and selects incoming signals use for position calculation in accordance with a result of comparing the obtained address information items with the address information items analyzed in accordance with the incoming signals. That is, signals incoming from a mobile station or base station are selected at the reception side of signals used for positioning to calculate the position of the mobile station. Therefore, even when a mobile station or base station receives an unexpected signal from a walkie-talkie unrelated to positioning in a channel for performing positioning, it is possible to calculate a position by using correct information and restrain deterioration of a positioning accuracy.

[0010]

[EMBODIMENT OF THE INVENTION]

FIG. 1 is a block diagram of a radio communication system of an embodiment of the present invention.

[0011]

Base stations 1, 2, 3, 4, 5, 6, 7, 8, 9, and 10 are set around a mobile station 11. The base stations 1 to 10 are connected to a server 12 via a network 13. A plurality of base stations receives signals from the mobile station

11 or the mobile station 11 receives signals from a plurality of base stations, obtains a propagation time difference from reception timings of signals, and calculates the position of the mobile station 11.

5 [0012]

FIG. 2 is a block diagram showing a configuration of the base stations 1 to 10 of a first embodiment.

[0013]

A network I/F section 36 is an interface for
10 connecting a base station with the network 13. A control section 35 controls a radio section 20 and a signal capture section 30. Moreover, the control section 35 selects incoming signals recorded in an accumulation section 33 by using the address information items on analyzed incoming
15 signals. Furthermore, the control section 35 records the information items communicated from an analysis section 26 in a memory 37.

[0014]

An I/F 27 is an interface of the radio section 20,
20 which mediates information and control signals input to or output from the radio section 20. A MAC section 25 sends a MAC PDU (MAC Protocol Data Unit) to a base band section (BB section) 24. The control information on the MAC PDU sent from the BB section 25 is analyzed by the analysis section
25 26 to process the MAC PDU in accordance with a MAC protocol.

[0015]

The BB section 24 assembles a packet in accordance with the MAC PDU, modulates a digital signal, and sends the modulated digital signal to a DA converter (DAC) 23. The
5 DAC 23 converts the digital signal sent from the BB section 24 into an analog signal and sends the analog signal to an RF section 21.

[0016]

Moreover, the BB section 24 demodulates a signal sent
10 from the AD converter (ADC) 22 and sends the MAC PDU to a MAC section 25. The ADC 22 converts an analog signal incoming from the RF section 21 into a digital signal and sends the digital signal to the BB section 24 and signal capture section 30 (determination section 31).

15 [0017]

An I/F 34 is an interface of the signal capture section 30, which mediates information and control signals input to or output from the signal capture section 30. The determination section 31 determines whether to record an
20 incoming signal in the accumulation section 33 and the accumulation section 33 records an incoming signal sent from the radio section 20 in accordance with the determination result. For example, the determination section 31 calculates an output signal amplitude of the ADC 22 and
25 determines whether to record an output signal of the ADC 22

in the accumulation section 33 when the amplitude exceeds a threshold value. A counter 32 generates a time stamp for recording the reception time of a signal.

[0018]

5 FIG. 3 is a block diagram showing a configuration of the server 12 of the first embodiment of the present invention.

[0019]

10 A network 150 is an interface between the network 13 and the server 12.

[0020]

A user I/F section 153 is an interface between the server 12 and a user, which serves as an interface to a display unit and a keyboard.

15 [0021]

A control section 151 generates and analyzes signals transmitted and received through the network 13 (for example, refer to FIG. 5 and 16), controls transmission and reception, and calculates the position of the mobile station 11.

[0022]

25 A storage device 152 stores base station information (FIG. 11) and mobile station information (FIG. 12) on a radio communication system of an embodiment of the present invention.

[0023]

FIG. 4 is a format diagram showing a configuration of a packet transmitted and received through the network 13 for an embodiment of the present invention.

5 [0024]

The packet is constituted by a preamble 40, header 41, and MAC PDU 42 assembled by the BB section 24.

[0025]

The preamble 40 and header 41 serve as control
10 information for fetching the MAC PDU by demodulating it at the reception side. The MAC PDU 42 constituted by control information 43 and data 44. The control information 43 includes destination information 45, source information 46, and access point information 47. For example, the
15 destination information 45 shows the MAC address of a destination of a packet, the source information 46 shows the MAC address of the source of a packet, and the access point information 47 shows the MAC address of a base station (access point) through which a packet goes.

20 [0026]

More specifically, when transmitting a packet from the mobile station 11 to the server 12 via the base station 2, the destination information 45 serves as the MAC address of the server 12, the source information 46 serves as the
25 MAC address of the mobile station 11, and the access point

information 47 serves as the MAC address of the base station
2. The destination information 45, source information 46,
and access point information 47 are allowed as long as they
are control information capable of specifying the
5 destination, source, and access point of a packet through
which the packet goes. For example, it is also allowed to
use the IP (Internet Protocol) address of the destination
of a packet for the destination information 45, the IP
address of the source of a packet for the source information
10 46, and the IP address of a base station for the access point
information 47.

[0027]

FIG. 5 is a sequence diagram for position calculation
of the first embodiment of the present invention, which
15 shows signals transmitted and received when a plurality of
base stations receives signals from the mobile station 11
and the server 12 calculates the position of the mobile
station 11.

[0028]

20 The base station 7 regularly transmits a beacon and
communicates the MAC address of the base station 7 and an
ESS-ID showing the network name of a wireless LAN to
peripheral stations (100).

[0029]

The mobile station 11 receiving a beacon transmits an association request including the MAC address of the mobile station 11 to the base station 7 to request the connection to the wireless LAN.

5 [0030]

The base station 7 receiving the association request (101) transmits an association response to the mobile station 11 in accordance with an authentication result of the mobile station 11 to communicate success or fail of association (connection to wireless LAN) (102). When
10 succeeding in the association, the mobile station 11 can communicate with the server 12 through the network 13 by using the base station 7 as an access point.

[0031]

15 When the mobile station 11 succeeds in the association, the base station 7 transmits the association information including the MAC address of the mobile station 11 and that of the base station 7 to the server 12 (103).

[0032]

20 When the mobile station 11 transmits a positioning request (104) to the server 12, the server 12 selects a plurality of base stations 200 for reception positioning signals (at least three (such as base stations 2, 6, and 7) in order to obtain a two-dimensional measuring result) (the
25 selected base stations are hereafter explained as "base

stations 200"). It is allowed to include the base station 7 with which the mobile station 11 associates in base stations for reception positioning signals.

[0033]

5 Moreover, the server 12 transmits a signal reception request to the selected base station 200 (105). The signal reception request (105) includes the mobile station 11 to be positioned, base station 7, MAC address of the server 12, and the information on a communication channel through which
10 a positioning signal is transmitted and received.

[0034]

The base station 200 receiving the signal reception request (105) transmits a signal reception response to the server 12 (106).

15 [0035]

After receiving the signal reception response (106) from the base station 200, the server 12 transmits a transmission request of a positioning signal to the mobile station 11 (107). The base station 200 for receiving a
20 positioning signal receives the transmission request signal (107) and uses the reception time of the transmission request signal as the criterion of the reception time of the positioning signal (108).

[0036]

The mobile station 11 receiving the positioning-signal transmission request (107) transmits a positioning signal (108). By using a ping from the server 12 to the mobile station 11 for the transmission request signal (107) and positioning signal (108), it is possible to use an echo request message as the transmission request signal (107) and a response (echo message) to the echo request message as the positioning signal (108).

[0037]

10 The base station 200 receives the transmission request (107) and positioning signal (108) and transmits the incoming signal and its reception time to the server 12 as reception information (110).

[0038]

15 The server 12 receiving the incoming information (110) from the base station 200 transmits a positioning cancel request to the base station 200 (111) and the base station 200 receiving the cancel request (111) transmits a cancel response to the server 12 (112).

20 [0039]

FIG. 6 is a flowchart of positioning-signal reception processing at the base station 200 of the first embodiment of the present invention.

[0040]

First, the control section 35 receives the address information items (destination information, source information, and access point information) on the packet of a desired signal (signal used for positioning) (step 70).
5 These information items necessary for positioning are transmitted from the server 12 in accordance with the signal reception request 105 (refer to FIG. 5). Moreover, when receiving the signal reception request (105), the control section 35 of the base station 200 clears the information
10 items recorded in the internal memory 37 and accumulation section 33 and initializes positioning.
[0041]

The control section 35 records incoming information in the accumulation section 33 in accordance with a
15 determination result by the determination section 31 (step 71). Moreover, the control section 35 reads out a recording start time from the counter 32 and records the time in the accumulation section 33. It is allowed for the control section 35 to record a record end time.
20 [0042]

Furthermore, the analysis section 26 analyzes the destination information, source information, and access point information on the packet of incoming signals and communicates these information items to the control section
25 35 (step 72).

[0043]

Furthermore, the control section 35 selects a desired signal or packet suitable for the address information communicated in step 70 by using the destination information, source information, and access point information communicated in step 72 (step 73).

[0044]

Furthermore, the control section 35 relates the signal selected in step 73 with a packet and a signal recorded in the accumulation section 33 (step 74) and reads out the signal selected in step 73 and an incoming signal corresponding to the packet and its time stamp from the accumulation section 33 (step 75).

[0045]

Thereafter, the control section 35 transmits the information read out in step 75 to the server 12 as the incoming information (110) and the server 12 uses the incoming information (110) for position calculation of the mobile station 11.

[0046]

FIG. 7 is a block diagram of the information recorded in the accumulation section 33 of the first embodiment of the present invention.

[0047]

The information recorded in the accumulation section 33 is recorded in which a time stamp 50 and the like are related with incoming information 51 and the like.

[0048]

5 The incoming signals 51, 53, and 55 are incoming signals of the base station 38 output from the ADC 22. The time stamps 50, 52, and 54 show recording start times of the accumulated incoming signals 51, 53, and 55 respectively. Incoming signals are recorded in order of being output from
10 the ADC 22. That is, a signal output at the first time is recorded as 51, a signal output at the second time is recorded as 52, and a signal output at the nth time is recorded as 53.

[0049]

15 For example, as shown in FIG. 8, the base station 7 receives a packet 15 from the base station 10 and then, receives a packet 16 from the mobile station 11. Thereafter, the base station 7 receives n packets. When the source information 46 on the packet 16 received from the mobile
20 station 11 by the base station 7 shows the MAC address of the mobile station 11 and the destination information 45 for the packet 16 shows the MAC address of the base station 7, the packet 16 is a desired incoming signal used for position calculation. The packet 15 is a noise which is not selected
25 in step 73.

[0050]

FIG. 9 is a block diagram of the communication information constituted by destination and source information items controlled by the control section 35 of the base station of the first embodiment of the present invention.

[0051]

Communication information 66 includes the destination information 45 and source information 46 communicated from the analysis section 26 to the control section 35 at the first time. Moreover, communication information 67 includes the destination information 45 and source information 46 communicated from the analysis section 26 to the control section 35 at the second time. Moreover, communication information 68 includes the destination information 45 and source information 46 communicated from the analysis section 26 to the control section 35 at the nth time.

[0052]

The control section 35 selects a communication information item suitable for a condition used for position calculation by a source and destination from among communication information items 66, 67, and 68. Moreover, the reception time of a signal used for position calculation is specified by specifying the time stamp 50 and the like

and the incoming signal 51 and the like corresponding to the communication information suitable for a selected condition out of the contents (FIG. 7) recorded in the accumulation section 33.

5 [0053]

Because the recording order of the communication information 66 and the like shown in FIG. 9 is equal to the recording order of the time stamp 50 and the incoming signal 51 and the like, the reception time (time stamp) is specified
10 by using the order of incoming signals recorded in the accumulation section 33 by the control section 35 and the order of incoming signals communicated from the analysis section and thereby mutually relating communication information, time stamps, and incoming signals. That is,
15 when the information communicated from the analysis section 26 at the k-th time is selected, the control section 35 reads out the incoming signal recorded in the accumulation section 33 at the k-th time.

[0054]

20 For example, because the communication information 67 is the information communicated and stored at the second time when the communication information 67 is selected as the communication information whose source is the mobile station 11 and whose destination is the server 12, the
25 control section 35 communication information 67 reads out

the incoming signals recorded in the accumulation section 33 at the second time, that is, the time stamp 52 and incoming signal 53 correspondingly to the communication information 67 communicated at the second time and discards incoming
5 signals other than incoming signals 52 and 53.

[0055]

Then, another example of relating communication information with an incoming signal in the case of the first embodiment is described below. Communication information
10 items are related with incoming signals not in accordance with the order of the communication information items but in accordance with time stamps (communication times) of the communication information items.

[0056]

15 FIG. 10 is a block diagram of the communication information constituted by including destination and source information items controlled by the control section 35 of the base station of the first embodiment of the present invention.

20 [0057]

Communication information 61 includes the destination information 45, source information 46, and access point information 47 communicated from the analysis section 26 to the control section 35 at the first time.
25 Moreover, communication information 63 includes the

destination information 45, source information 46, and
access point information 47 communicated from the analysis
section 26 to the control section 35 at the second time.
Furthermore, communication information 65 includes the
5 destination information 45, source information 46, and
access point information 47 communicated from the analysis
section 26 to the control section 35 at the nth time.

[0058]

When information items 61, 63, and 65 are communicated
10 from the analysis section 26, the control section 35 reads
out time stamps 60, 62, and 64 showing times of the
information items 61, 63, and 65 from the counter 32 and
stores the time stamps 60, 62, and 64 in the memory 37 by
relating the time stamps to the communication information
15 items 61, 63, and 65.

[0059]

The control section 35 selects communication
information whose source and destination are suitable for
a condition used for position calculation out of the
20 communication information items 66, 67, and 68. Moreover,
the control section 35 specifies the time stamp 50 and the
like and the incoming signal 51 and the like corresponding
to the communication information suitable for the selected
condition in accordance with the contents (FIG. 7) recorded

in the accumulation section 33 to specify the reception time of a signal used for position calculation.

[0060]

The reception time (time stamp) is specified in accordance with the time stamp 60 stored correspondingly to the communication information 61 and the like shown in FIG. 9 and the time stamp 50 and the like shown in FIG. 7. That is, the time stamp 60 and the like (FIG. 9) and the time stamp 50 and the like (FIG. 7) are mutually equal or retroactively closest. Therefore, the reception time of a signal is specified by mutually comparing the both time stamps and thereby mutually relating communication information, a time stamp, and an incoming signal.

[0061]

For example, when the communication information 63 is selected as the communication information whose source is the mobile station 11, whose destination is the server 12, and whose access point is the base station 7, the control section 35 compares the time stamp 62 of the communication information 63 with a time stamp recorded in the accumulation section 33 and selects the time stamp 52 as a time stamp retroactively closest to the time stamp 62. This is because the time when the analysis section 26 communicates an analysis result to the control section 35 and the control section 35 obtains a time stamp from the

counter 32 is later than the time when a time stamp is recorded in the accumulation section 33. The control section 35 reads out the time stamp 52 and incoming information 53 from the accumulation section 33 and discards
5 information other than the information items 52 and 53.
[0062]

FIG. 11 is a block diagram of the base station information stored in the storage device 152 of the server 12 of the first embodiment of the present invention.
10 [0063]

The identifier 161 of a base station, identifier 162 of the communication channel of each base station, antenna position coordinates 163 of each base station, IP (Internet Protocol) address 164 of each base station, and MAC address
15 165 of each base station are mutually related and stored. A manager records the base station information is recorded through the user I/F section 153 when constructing a system.
[0064]

FIG. 12 is a block diagram of mobile station information stored in the storage device 152 of the server
20 12 of the first embodiment of the present invention.
[0065]

An identifier 171 of a mobile station, identifier 172 of a base station mutually associating mobile stations, IP
25 address 173 of each mobile station, and MAC address of each

mobile station are mutually related and stored. The mobile station information is communicated from the base station 7 in accordance with association information 103 (refer to FIG. 5).

5 [0066]

The control section 151 reads out MAC addresses of mobile stations and the MAC address of a base station mutually associating mobile stations from the base station information (FIG. 11) and mobile station information (FIG. 10 12) to generate a signal reception request 105 (or positioning-signal information 117 in the case of a second embodiment).

[0067]

An example for selecting a signal used for positioning 15 in accordance with three information items such as a source, destination, and access point is described above. However, it is also allowed to select a signal used for positioning by using two information items such as a source (MAC address of the mobile station 11) and a destination (MAC address of 20 the server 12). This is because a signal transmitted from the mobile station 11 to the server 12 after transmitting the positioning request signal (104) is the positioning request signal (108) and therefore, it is possible to select a signal used for positioning without specifying an access 25 point (route information).

[0068]

Moreover, it is possible to select a signal used for positioning by using only the information on a source (MAC address of the mobile station 11) when stopping transmission of a signal sent from a mobile station to be positioned during a measurement period {period between transmission of the positioning request signal (104) and transmission of the positioning signal (108)} without stopping transmission of a signal sent from other mobile station. This is because a signal transmitted from the mobile station 11 after transmitting the positioning request signal (104) is the positioning signal (108) and therefore, it is possible to select a signal used for positioning without specifying an access point (route information) or a destination (MAC address of the server 12).

[0069]

Furthermore, it is possible to select a signal used for positioning by using only the information on a destination (MAC address of the server 12) when stopping transmission of a signal to the server 12 (that is, when positioning one station by one station) without stopping other transmission. This is because a signal transmitted to the server 12 after transmitting the positioning request signal (104) is the positioning signal (108) and therefore, it is possible to select a signal used for positioning

without specifying an access point (route information) or a source (MAC address of the mobile station 11).

[0070]

FIG. 13 shows a configuration of a system for
5 selecting a signal used for positioning by using only the information on a destination (MAC address of the server 12). The mobile station 201 is present in addition to a base station used for positioning and the mobile station 11 positioned in a communicable range.

10 [0071]

FIG. 14 shows a sequence diagram for position calculation in the system shown in FIG. 13. When receiving the positioning request 104 from the mobile station 11, the server 12 selects the base station 200 out of base stations
15 respectively capable of receiving a signal from the mobile station 11 and communicates a transmission inhibition designation 181 via the base station 200. A mobile station receiving the transmission inhibition designation 181 stops transmission of information to be performed by an
20 application for a certain period. OSI (Open Systems Interconnection) is included in a network design policy for performing the communication between models different from each other established by the International Standardization Organization (ISO). For example, a communication protocol
25 can be classified into an application layer and its lower

layer by the seven hierarchical mode of OSI. For example,
a mobile station performs the processing of making a task
of the application layer sleep for a certain period. A ping
can receive a transmission request (echo request message)
5 in accordance with the bylaw of the ICMP (Internet Control
Message Protocol) on an application lower layer and transmit
a positioning signal (echo message).
[0072]

As described above, the first embodiment of the
10 present invention is a position calculating method in which
base stations 1 to 10 respectively measure the reception
time (reception timing) of a signal incoming from the mobile
station 11 to calculate the position of the mobile station
11 by using the reception time and the reception position
15 (antenna position of a base station) of the signal and which
obtains the address information items necessary to specify
incoming signals used for the position calculation,
analyzes destination information (MAC address of the server
12) and/or source information (MAC address of the of the
20 mobile station 11), and moreover access point information
(MAC address of a base station), and selects incoming
signals used for position calculation in accordance with a
result of comparing the obtained address information items
with the address information items analyzed in accordance
25 with the incoming signals. Therefore, it is possible to

calculate a position by using correct information and
restrain deterioration of a positioning accuracy even when
receiving an unexpected signal from a walkie-talkie.

[0073]

5 Moreover, because a base station captures signals and
then selects a desired signal, it is not necessary to stop
transmission of a signal by a radio station (mobile station
or base station) present in a receivable range from a base
station for capturing a signal. Therefore, it is possible
10 to restrain deterioration of the whole throughput of a
system compared to the case of stopping transmission of
signals during positioning. Furthermore, because it is not
necessary to control the transmission by a walkie-talkie not
built in a system used for positioning, it is possible to
15 make an independent system set by other businessman or an
individual coexist.

[0074]

Then, a second embodiment of the present invention is
described below. In the case of the second embodiment, a
20 mobile station 11 captures and selects incoming signals.

[0075]

FIG. 15 is a block diagram showing a configuration of
the mobile station 11 of the second embodiment of the present
invention.

25 [0076]

A user I/F section 136 is an interface between the mobile station 11 and a user, which includes a display unit and a keyboard.

[0077]

5 A control section 135 controls a radio section 20, a signal capture section 30, and the user I/F section 136. Moreover, the control section 135 selects incoming signals recorded in an accumulation section 33 by using the information sent from an analysis section 26.

10 [0078]

Because the configuration of the radio section 20 and signal capture section 30 is the same as the case of the base station of the above-described first embodiment (FIG. 2), detailed description of it is omitted. Moreover, because
15 selection of signals recorded in the accumulation section 33 is the same as the case of the above-described first embodiment (FIGs. 6 to 10), detailed description of it is omitted. For example, incoming signals are recorded in the accumulation section 33 in accordance with the format shown
20 in FIG. 7. Furthermore, the control section 135 records the information communicated from the analysis section in accordance with the format shown in FIG. 9 or 10.

[0079]

Furthermore, because the configuration of a radio
25 communication system, that of base stations 1 to 10, and that

of a server 12 are the same as corresponding configurations (FIGs. 1, 2, and 3) of the above-described first embodiment, detailed description of the configurations is omitted.

[0080]

5 FIG. 16 is a sequence diagram for position calculation of the second embodiment of the present invention, which shows signals transmitted and received when the mobile station 11 receives signals from a plurality of base stations and the server 12 calculates the position of the
10 mobile station 11.

[0081]

A base station 7 regularly transmits a beacon and communicates the MAC address of the base station 7 and the ESS-ID showing the network name of a wireless LAN to
15 peripheral stations (100).

[0082]

The mobile station 11 receiving a beacon transmits an association request including the MAC address of the mobile station 11 to the base station 7 to request the connection
20 to the wireless LAN.

[0083]

The base station 7 receiving the association request (101) transmits an association response to the mobile station 11 in accordance with an authentication result of
25 the mobile station 11 to communicate success or fail of

association (connection to the wireless LAN) (102). When succeeding in the association, the mobile station 11 can communicate with the server 12 through a network 13 by using the base station 7 as an access point.

5 [0084]

When the mobile station 11 succeeds in association, the base station 7 transmits the association information including the MAC address of the mobile station 11 and that of the base station 7 to the server 12 (103).

10 [0085]

When the mobile station 11 transmits a positioning request (104) to the server 12, the server 12 selects at least three base stations 200 for respectively transmitting a positioning signal. It is allowed that the base station 7 with which the mobile station 11 is associated is included in a base station for transmitting a positioning signal.
[0086]

Moreover, the server 12 transmits a positioning preparation request to the selected base stations 200 (115).
20 The positioning preparation request (115) includes the information on a communication channel for transmitting signals. For example, the server 12 designates the communication channel of the base station 7 associating the mobile station 11 in accordance with the positioning
25 preparation request (115).

[0087]

The base station 200 receiving the positioning preparation request (115) transmits a positioning preparation response to the server 12 (116).

5 [0088]

The server 12 receiving the positioning preparation response (116) transmits positioning signal information to the mobile station 11 (117). The positioning signal information (117) includes the mobile station 11 to be
10 positioned, base stations 200 for transmitting signals, and the MAC address of the server 12 (network I/F section 36).

[0089]

The mobile station 11 receiving the positioning signal information (117) clears the information recorded in
15 an internal memory 37 and the accumulation section 33. Moreover, the mobile station 11 transmits a positioning-signal transmission request (118). The positioning-signal transmission request (118) is transmitted to the server 12 via the base station 7.

20 [0090]

The server 12 receiving the positioning-signal transmission request (118) transmits a positioning signal to the mobile station 11 via the selected base station 200 (119).

25 [0091]

When receiving the positioning signal (119), the mobile station 11 records the signal in the accumulation section 33. The analysis section 26 of the mobile station 11 analyzes the control information on a received packet.
5 The control section 135 of the mobile station 11 selects a desired signal (signal used for positioning) out of the analysis results described below and reads out incoming signals recorded in the corresponding accumulation section 33.

10 [0092]

The mobile station 11 transmits the incoming signals read out by the control section 135 and their reception times to the server 12 as incoming information (110).

[0093]

15 The server 12 receiving the incoming information (110) from the mobile station 11 transmits a positioning cancel request to the base station 200 (111) and the base station 200 receiving the cancel request (111) transmits a cancel response to the server 12 (112).

20 [0094]

The mobile station 11 selects the information on a MAC address designated by the positioning signal information 117 out of the communication information items (FIG. 9) communicated from the analysis section 26 and recorded in
25 an internal memory 137.

[0095]

Communication information 66 includes destination information 45 and source information 46 communicated from the analysis section 26 to the control section 135 at the first time. Moreover, communication information 67 includes destination information 45 and source information 46 communicated from the analysis section 26 to the control section 135 at the second time. Furthermore, communication information 68 includes destination information 45 and source information 46 communicated from the analysis section 26 to the control section 135 at the nth time.

[0096]

The control section 135 selects communication information suitable for a condition used for position calculation by a source and a destination out of the communication information items 66, 67, and 68. Moreover, the control section 135 specifies a time stamp 50 and the like and an incoming signal 51 and the like corresponding to the communication information suitable for the selected condition out of the contents recorded in the accumulation section 33 (FIG. 7) and specifies the reception time of a signal used for position calculation.

[0097]

Because the recording order of the communication information 66 shown in FIG. 9 and the like are equal to the

recording order of the time stamp 50 and the like and that of the incoming signal 51 and the like, the reception time (time stamp) of a signal is specified by using the order of incoming signals recorded in the accumulation section 33 by
5 the control section 135 and the order communicated from the analysis section and thereby, relating the communication information with the time stamp and the incoming signal. That is, when the information communicated from the analysis section 26 at the k-th time is selected, the control section
10 135 reads out the incoming signal recorded at the k-th time to the accumulation section.

[0098]

For example, when the communication information 67 is selected as the communication information whose source is
15 the server 12 and whose destination is the mobile station 11 by the control section 135, the control section 135 reads out the incoming signal recorded in the accumulation section 33 at the second time, that is, the time stamp 52 and incoming signal 53 correspondingly to the communication information
20 67 communicated at the second time because the communication information 67 is the information communicated at the second time and discards incoming signals other than the incoming signals 52 and 53.

[0099]

Moreover, the mobile station 11 can also select the information on a MAC address designated in accordance with the positioning signal information 117 out of the communication information items (FIG. 10) communicated from the analysis section and recorded in the internal memory 137. In this case, the communication information items are related with incoming signals in accordance with time stamps (communication times) of the communication information items instead of the order of the communication information items.

[0100]

The communication information 61 includes the destination information 45, source information 46, and access point information 47 communicated from the analysis section 26 to the control section 135 at the first time. Moreover, the communication information 63 includes the destination information 45, source information 46, and access point information 47 communicated from the analysis section 26 to the control section 135 at the second time. Furthermore, the communication information 65 includes the destination information 45, source information 46, and access point information 47 communicated from the analysis section 26 to the control section 135 at the nth time.

[0101]

When the communication information items 61, 63, and 66 are communicated from the analysis section 26, the control section 135 reads out time stamps 60, 62, and 64 showing times of the communication information items respectively from a counter 32 and relates the stamps with the communication information items 61, 63, and 65 to store the time stamps in the memory 37.

[0102]

The control section 135 selects the communication information whose source and destination are suitable for a condition used for position calculation out of the communication information items 66, 67, and 68. Moreover, the control section 135 specifies the time stamp 50 and the like and the incoming signal 51 and the like corresponding to the communication information suitable for the selected condition out of the contents (FIG. 7) recorded in the accumulation section 33 and specifies the reception time of a signal used for position calculation.

[0103]

The reception time (time stamp) is specified by the time stamp 60 and the like stored correspondingly to the communication information 61 and the like shown in FIG. 9 and the time stamp 50 and the like shown in FIG. 7. That is, because the corresponding time stamp 60 and the like (FIG. 9) and the time stamp 50 and the like (FIG. 7) are equal

to or retroactively closest to each other, reception times of signals are specified by comparing the both time stamps and thereby mutually relating communication information, time stamps, and incoming signals.

5 [0104]

For example, when the communication information 67 is selected as the communication information whose source is the mobile station 11 and whose destination is the server 12, the control section 135 compares the time stamp 62 of
10 the communication information 63 with a time stamp recorded in the accumulation section 33 and selects the time stamp 52 as a time stamp retroactively closest to the time stamp 62. This is because the time when the analysis section 26 communicates an analysis result to the control section 135
15 and the control section obtains a time stamp from the counter 32 is later than the time recorded in the accumulation section 33. The control section 135 reads out the time stamp 52 and incoming information 53 from the accumulation section 33 and discards information items other than the information
20 items 52 and 53.

[0105]

Though an example of calculating a position by the server 12 in accordance with a signal received by the mobile station 11 is described above, it is also allowed to
25 calculating a position by the control section 135 of the

mobile station 11. In this case, it is not necessary to transmit the information read out from the accumulation section 33 to the server 12 as the incoming information (110).

5 [0106]

Moreover, also in the case of the second embodiment, an example of selecting a signal used for positioning in accordance with three information items on a source, destination, and access point is described. It is also possible to select a signal used for positioning by using two information items on a source (MAC address of the server 12) and an access point (MAC address of a base station) when stopping transmission of signals sent from the server 12 during a measurement period {period between transmission of the positioning request signal (104) and transmission of the positioning signal (108)} (that is, when positioning one station by one station) without stopping other transmission. This is because a signal transmitted from the server 12 is the positioning signal (119) after transmitting the positioning signal information (117) and thereby, it is possible to select a signal used for positioning without specifying a destination (MAC address of the mobile station 11).

[0107]

As described above, the second embodiment of the present invention is a position calculating method in which the mobile station 11 measures reception times (reception timings) of signals incoming from the base stations 1 to 10 to calculate the position of the mobile station 11 by using the reception times and the reception positions (antenna position of a base station) of the signals and which obtains address information items necessary to specify incoming signals used for the above position calculation, analyzes the destination information (MAC address of the mobile station 11), source information (MAC address of the server 12), and moreover access point information (MAC address of a base station) included in the incoming signals, and selects incoming signals used for position calculation in accordance with a result of comparing the obtained address information items with address information items analyzed in accordance with the incoming signals. Therefore, even when receiving an unexpected signal from a walkie-talkie unrelated to positioning in a channel in which a mobile station or base station performs positioning, it is possible to calculate a position by using correct information and restrain the deterioration of a positioning accuracy.

[0108]

Moreover, because the mobile station 11 captures signals and then selects a desired signal, it is not

necessary to stop transmission of signals by a radio station (mobile station or base station) present in a receivable range from the mobile station 11 capturing signals.

Therefore, it is possible to restrain deterioration of the whole throughput of a system during positioning compared to the case of stopping transmission of signals. Moreover, because it is not necessary to control the transmission by a walkie-talkie not built in a system used for positioning, it is possible to make an independent system set by other businessman or an individual coexist.

[0109]

The following are typical aspects of the present invention other than the aspects described in claims.

[0110]

(1) A mobile communication system for performing communication between a base station and a mobile station, measuring reception times of signals transmitted and received between the base station and the mobile station, and calculating the position of the mobile station by using reception times and reception positions of the signals, comprising:

information obtainment unit for obtaining address information items necessary to specify incoming signals used for the position calculation;

address information analysis unit for analyzing the
address information items included in the incoming signals;
and

control unit for selecting incoming signals used for
5 position calculation in accordance with a result of
comparing the obtained address information items with
address information items analyzed in accordance with the
incoming signals.

[0111]

10 (2) The mobile communication system according to the
above item (1), wherein

the base station is provided with reception timing
measurement unit for measuring reception timings of signals
incoming from the mobile station,

15 the information analysis unit analyzes the
destination information and/or source information included
in the incoming signals as the address information items,
and

the control unit selects incoming signals used for
20 position calculation in accordance with a result of
comparing the obtained address information items with the
destination information and/or source information analyzed
in accordance with the incoming signals.

[0112]

(3) The mobile communication system according to the above item (1), wherein

the base station is provided with reception timing measurement unit for measuring reception timings of signals incoming from the mobile station and storage unit for
5 storing the incoming signals, and

the control unit selects the stored incoming signals by using the analyzed address information items.

[0113]

10 (4) The mobile communication system according to the above item (3), wherein

the control unit selects incoming signals by using the order in which incoming signals are stored in the storage unit and the order in which the address information items are analyzed and relating the stored incoming signals with
15 the address information items.

[0114]

(5) The mobile communication system according to the above item (3), wherein

20 the control unit selects incoming signals by using the reception timings of the incoming signals and times when the address information items are analyzed and mutually relating the stored incoming signals and the address information items.

25 [0115]

(6) The mobile communication system according to the above item (1), wherein

the mobile station is provided with reception timing measurement unit for measuring reception timings of signals incoming from the base station and storage unit for storing the incoming signals, and

the control unit selects the stored incoming signals by using the analyzed address information items.

[0116]

(7) The mobile communication system according to the above item (1), wherein MAC addresses are used as the address information items.

[BRIEF DESCRIPTION OF THE DRAWINGS]

[FIG. 1]

FIG. 1 is a block diagram of a radio communication system of an embodiment of the present invention.

[FIG. 2]

FIG. 2 is a block diagram showing a configuration of a base station of a first embodiment of the present invention.

[FIG. 3]

FIG. 3 is a block diagram showing a configuration of a server 12 of the first embodiment of the present invention.

[FIG. 4]

FIG. 4 is a format diagram of a packet transmitted and received for an embodiment of the present invention.

[FIG. 5]

FIG. 5 is a sequence diagram for position calculation
5 of the first embodiment of the present invention.

[FIG. 6]

FIG. 6 is a flowchart of the positioning-signal reception processing of the first embodiment of the present invention.

10 [FIG. 7]

FIG. 7 is a block diagram of the information recorded in an accumulation section 33 of the first embodiment of the present invention.

[FIG. 8]

15 FIG. 8 is a sequence diagram of signals transmitted and received for the first embodiment of the present invention.

[FIG. 9]

FIG. 9 is a block diagram of the communication
20 information controlled by a control section 35 of the first embodiment of the present invention.

[FIG. 10]

FIG. 10 is another block diagram of the communication
information controlled by the control section 35 of the
25 first embodiment of the present invention.

[FIG. 11]

FIG. 11 is a block diagram of the base station information stored in a storage device 152 of the first embodiment of the present invention.

5 [FIG. 12]

FIG. 12 is a block diagram of the mobile station information stored in the storage device 152 of the first embodiment of the present invention.

[FIG. 13]

10 FIG. 13 is another block diagram of a radio communication system of the first embodiment of the present invention.

[FIG. 14]

FIG. 14 is another sequence diagram for position
15 calculation of the first embodiment of the present invention.

[FIG. 15]

FIG. 15 is a block diagram showing a configuration of a mobile station 11 of a second embodiment of the present
20 invention.

[FIG. 16]

FIG. 16 is a sequence diagram for position calculation of the second embodiment of the present invention.

[DESCRIPTION OF THE NUMERALS]

25 1,2,3,4,5,6,7,8,9,10 Base station

- 11 Mobile station
- 12 Server
- 13 Network
- 15,16,17 Radio signal
- 5 20 Radio unit
- 21 High frequency unit (RF unit)
- 22 AD Converter (ADC)
- 23 DA Converter (DAC)
- 24 Baseband unit (BB unit)
- 10 25 MAC unit
- 26 Analysis unit
- 27 Interface (I/F)
- 30 Signal capture unit
- 31 Determination unit
- 15 32 Counter
- 33 Accumulation unit
- 34 Interface (I/F)
- 35 Control unit
- 36 Network Interface unit (I/F)
- 20 37 Memory.
- 38 Base station
- 135 Control unit
- 136 User Interface unit
- 137 Memory
- 25 150 Network interface unit

151 Control unit

152 Storage device

153 User interface unit

200 Base station

[NAME OF THE DOCUMENT] ABSTRACT


[SUMMARY]

[PROBLEM] A signal incoming from a desired radio station is thus selected and used for position calculation.


- 5 [SOLUTION] A method of measuring reception timings of signals transmitted and received between base stations and a mobile station and calculating the position of the mobile station by using the reception timings and the reception positions of the signals comprises the steps of obtaining
- 10 the address information items necessary to specify incoming signals used for the position calculation, analyzing address information items included in the incoming signals, and selecting incoming signals used for position calculation according to a result of comparing the obtained
- 15 address information items with address information items analyzed in accordance with the incoming signals.




[FIG.1]

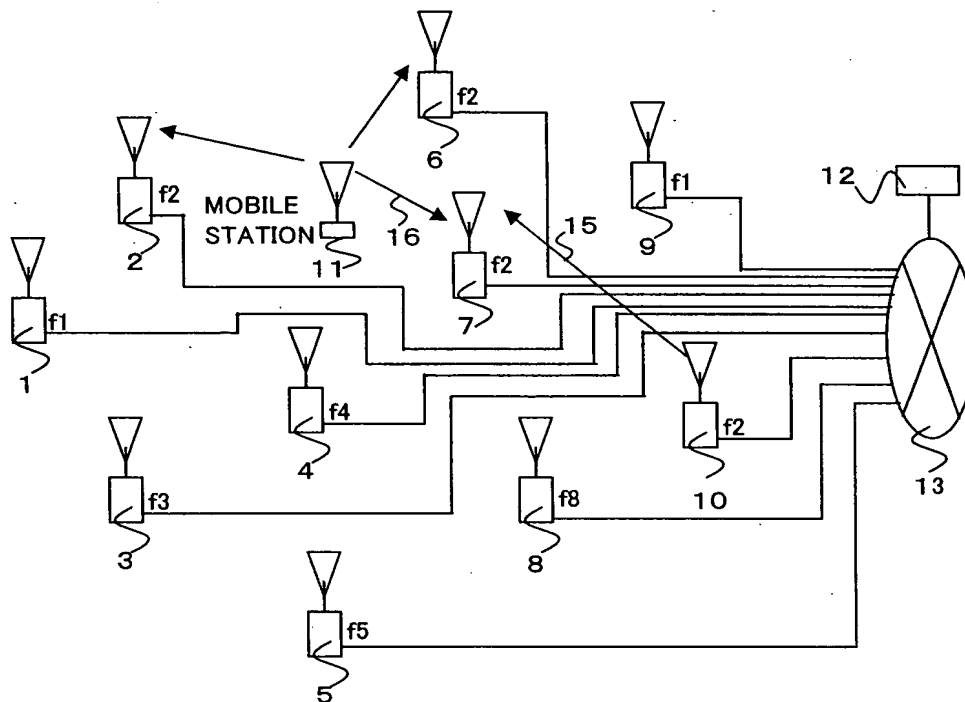


[FIG.2]

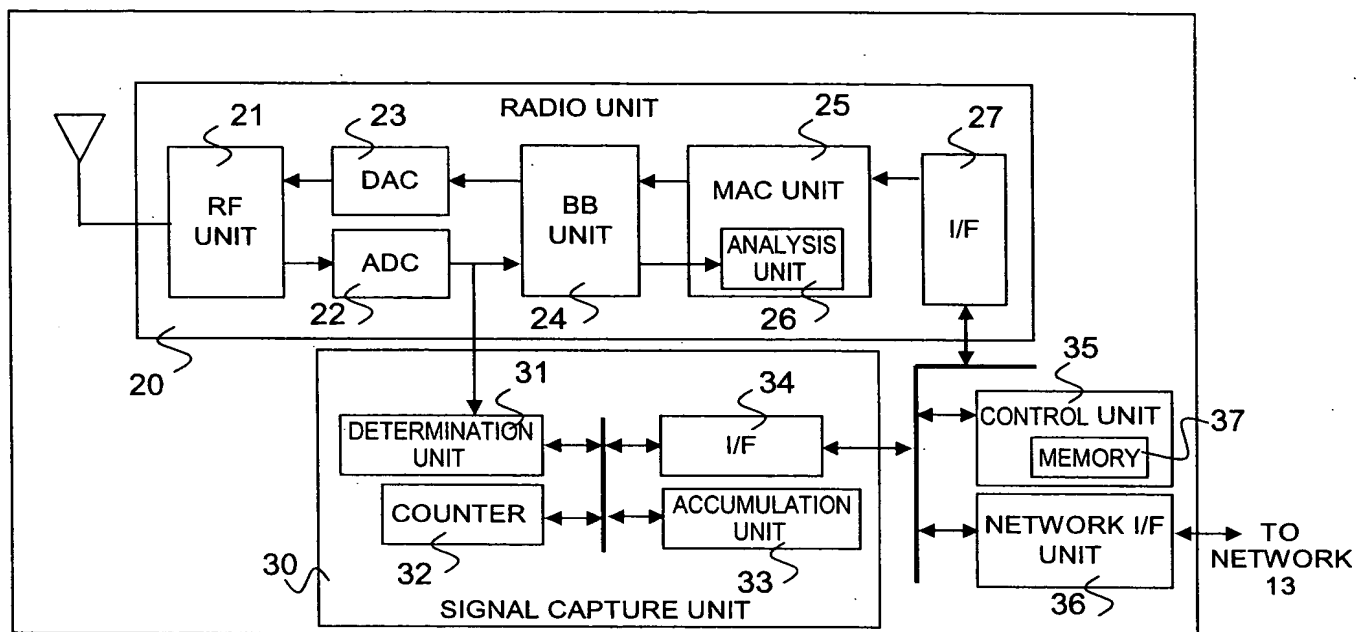


[FIG.3]

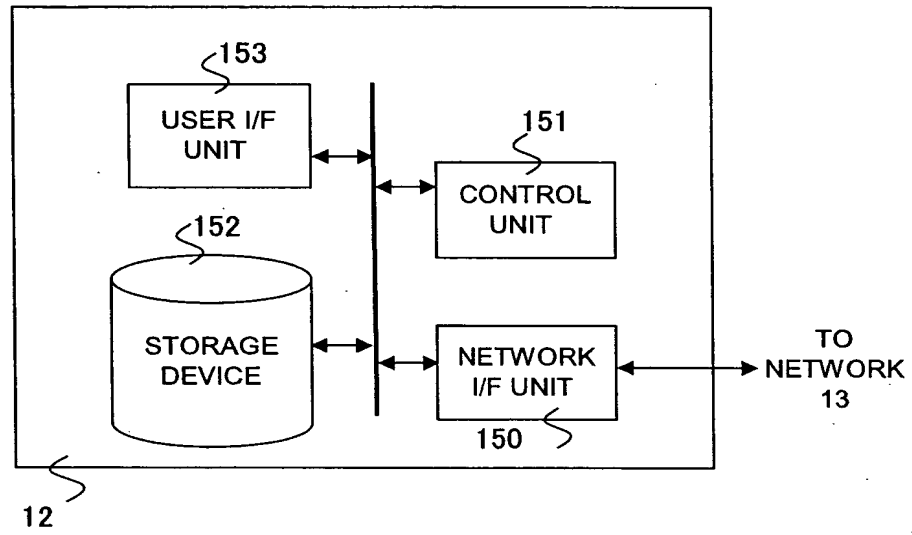


[FIG.4]

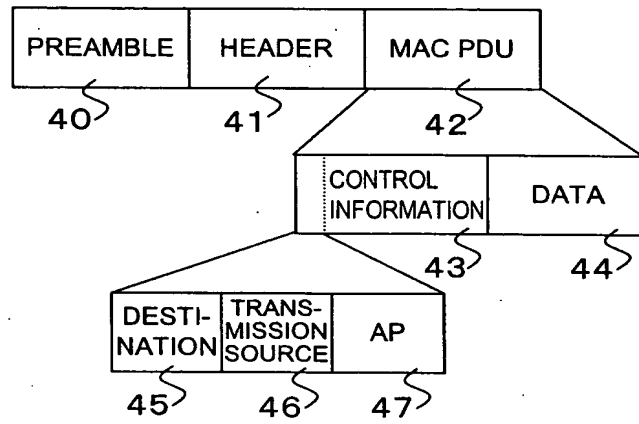

[FIG.5]

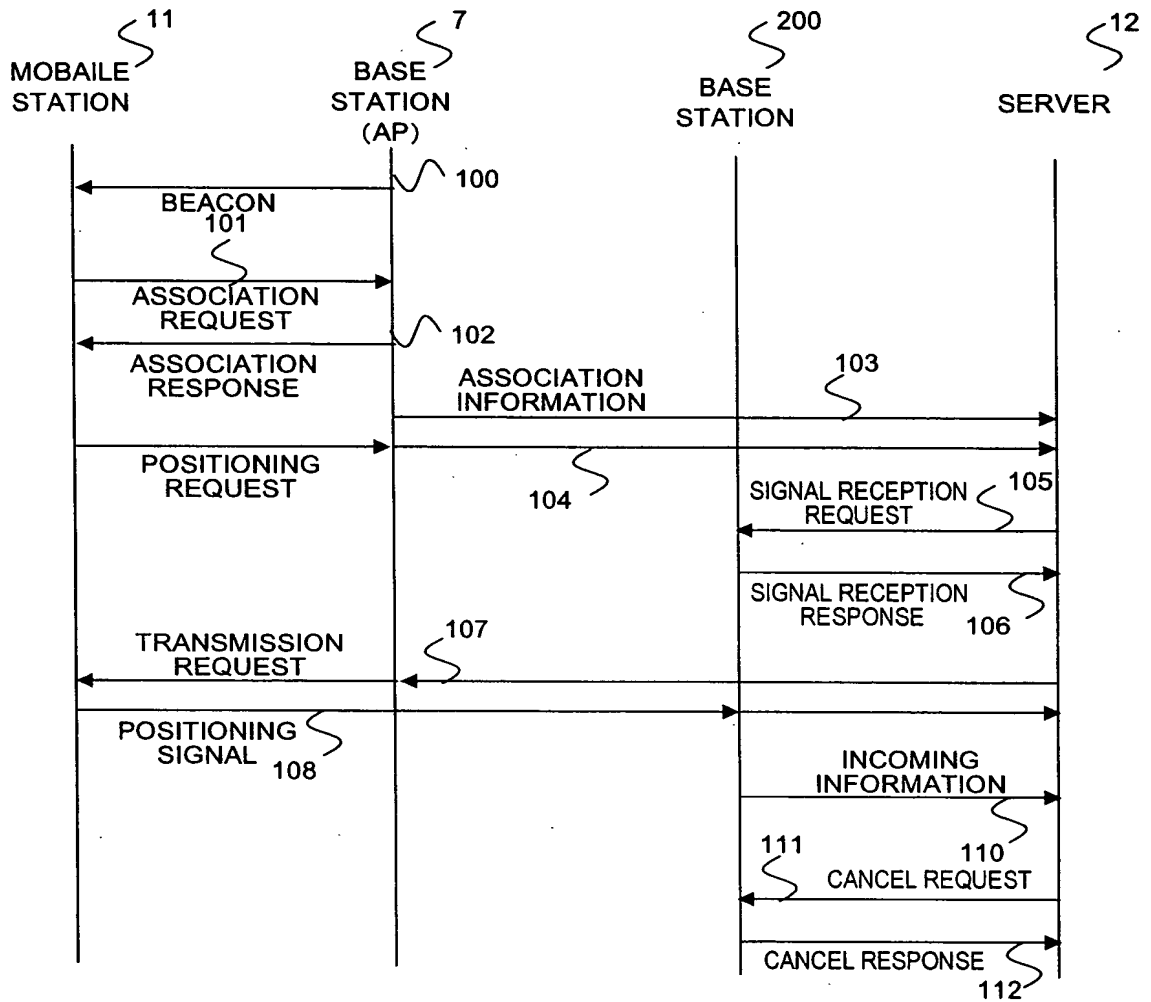


[FIG.6]

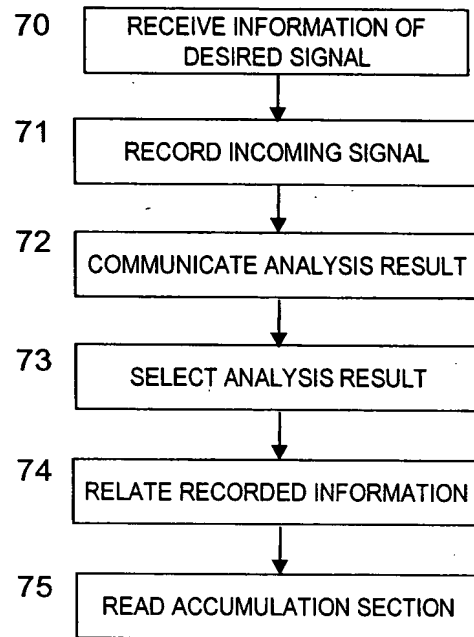


[FIG.7]

50	TIME STAMP	INCOMING SIGNAL	51
52	TIME STAMP	INCOMING SIGNAL	53
	
54	TIME STAMP	INCOMING SIGNAL	55

[FIG.8]

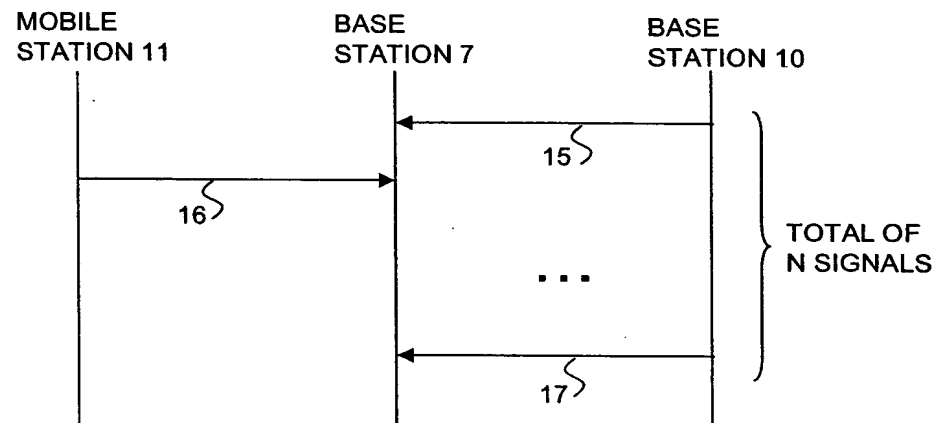

[FIG.9]

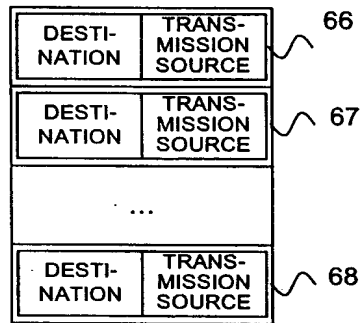

[FIG.10]

60	TIME STAMP	DESTI- NATION	TRANS- MISSION SOURCE	AP	61
62	TIME STAMP	DESTI- NATION	TRANS- MISSION SOURCE	AP	63
			
64	TIME STAMP	DESTI- NATION	TRANS- MISSION SOURCE	AP	65


[FIG.11]

161 S	162 S	163 S	164 S	165 S
BASE STATION IDENTIFIER	CHANNEL IDENTIFIER	BASE STATION ANTENNA COORDINATES	IP ADDRESS	MAC ADDRESS
...


[FIG.12]

171 ⌞	172 ⌞	173 ⌞	174 ⌞
MOBILE STATION IDENTIFIER	BASE STATION IDENTIFIER	IP ADDRESS	MAC ADDRESS
...


[FIG.13]

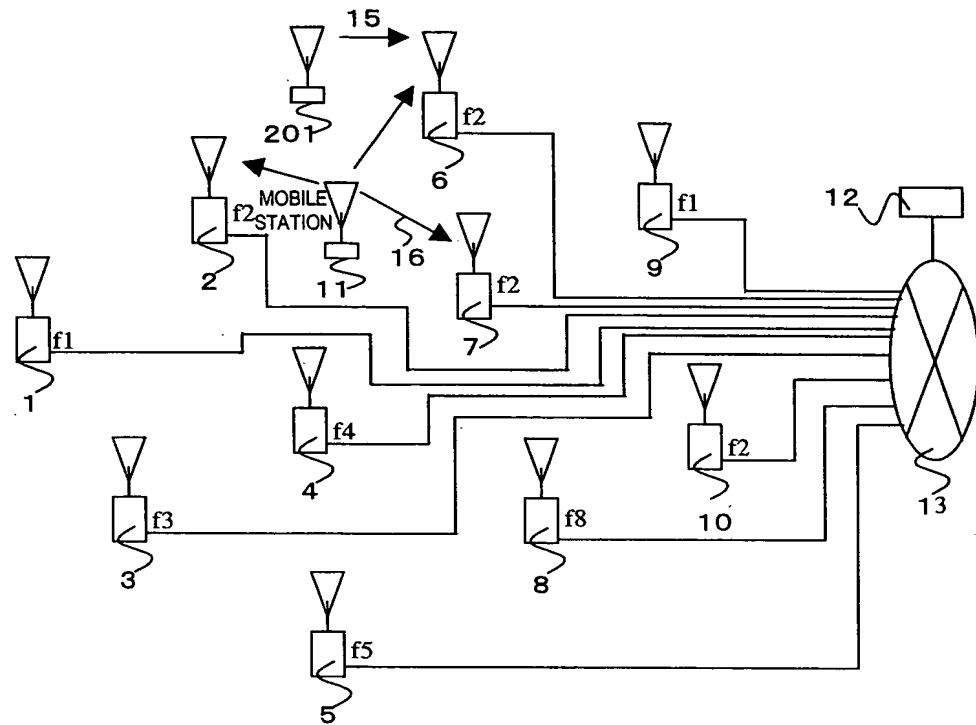


[FIG.14]

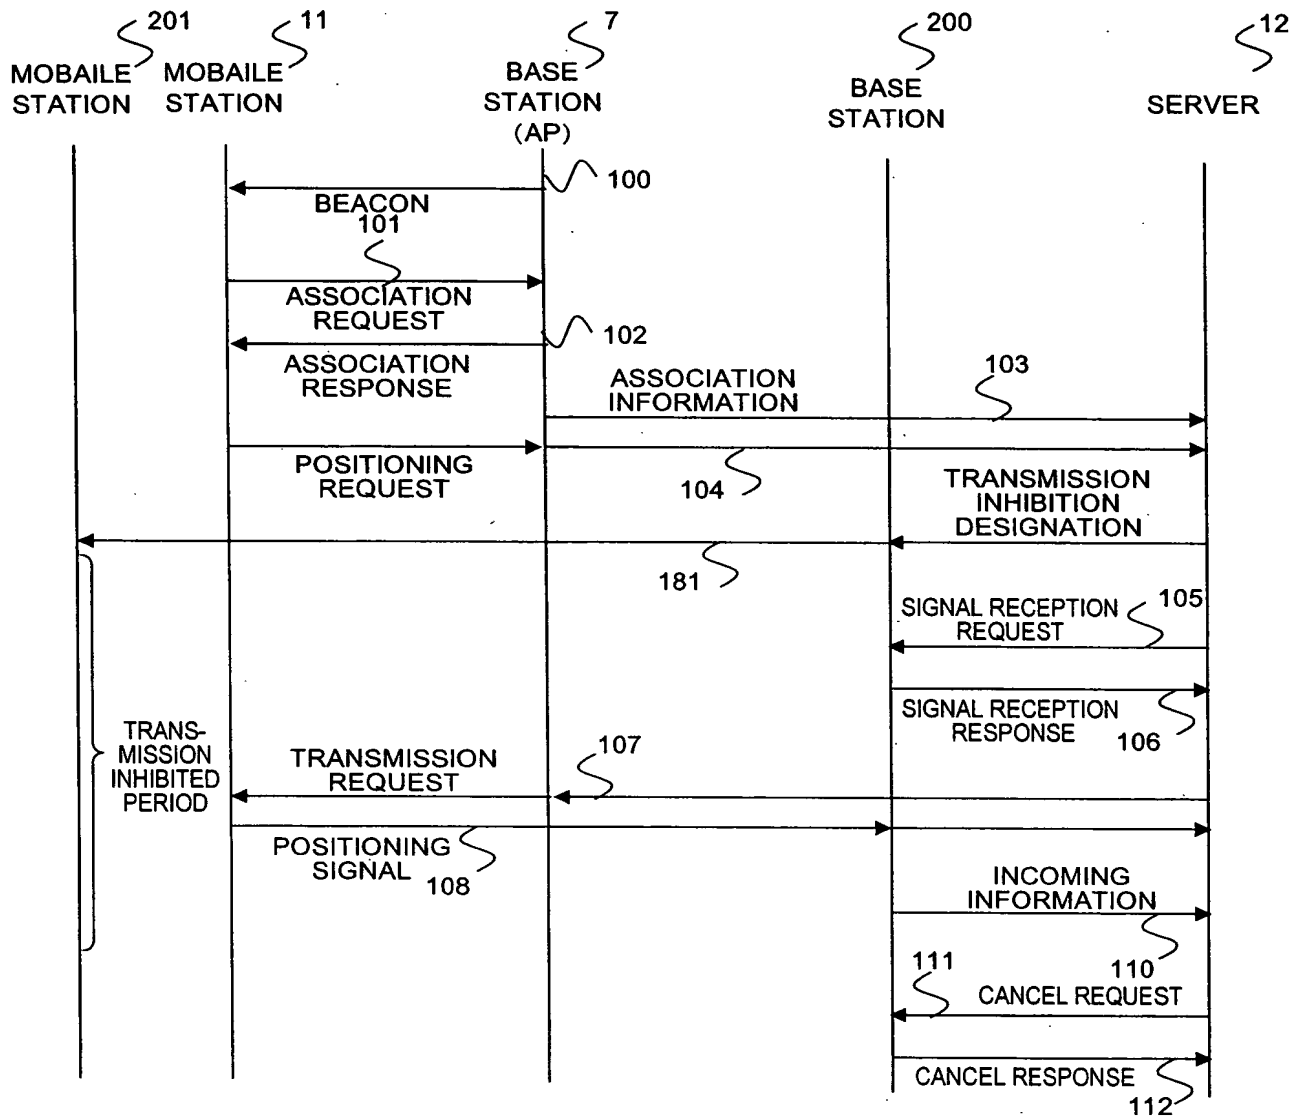

[FIG.15]

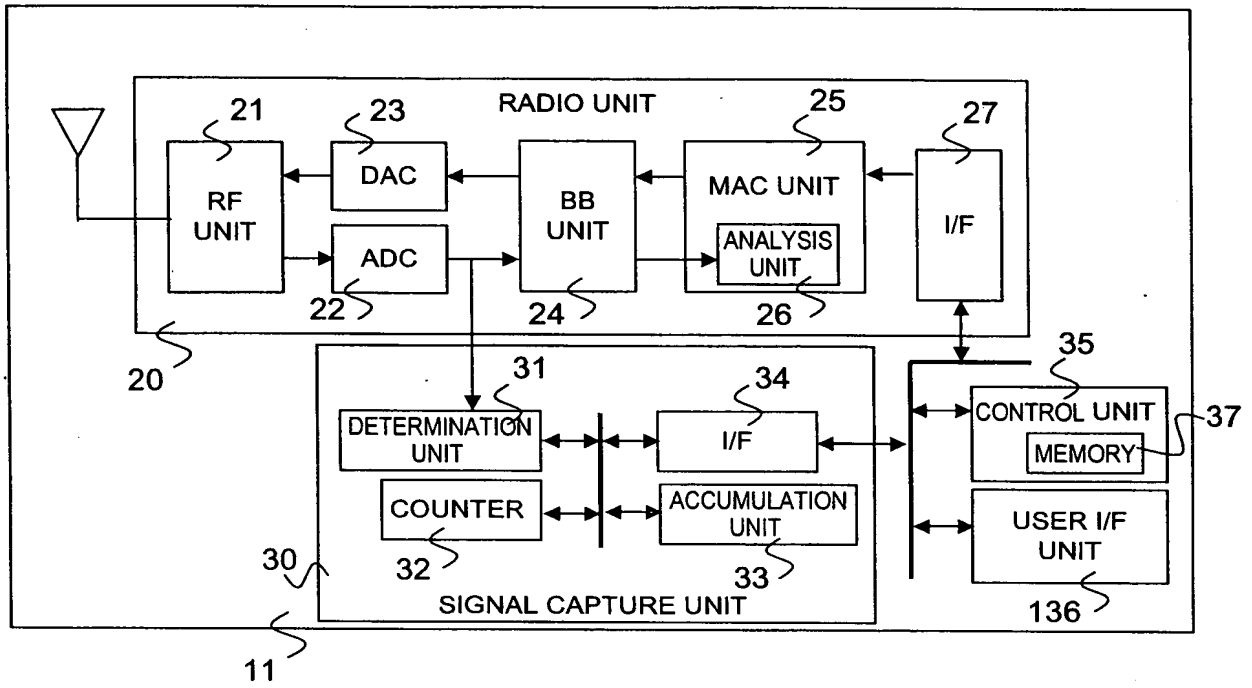

[FIG.16]

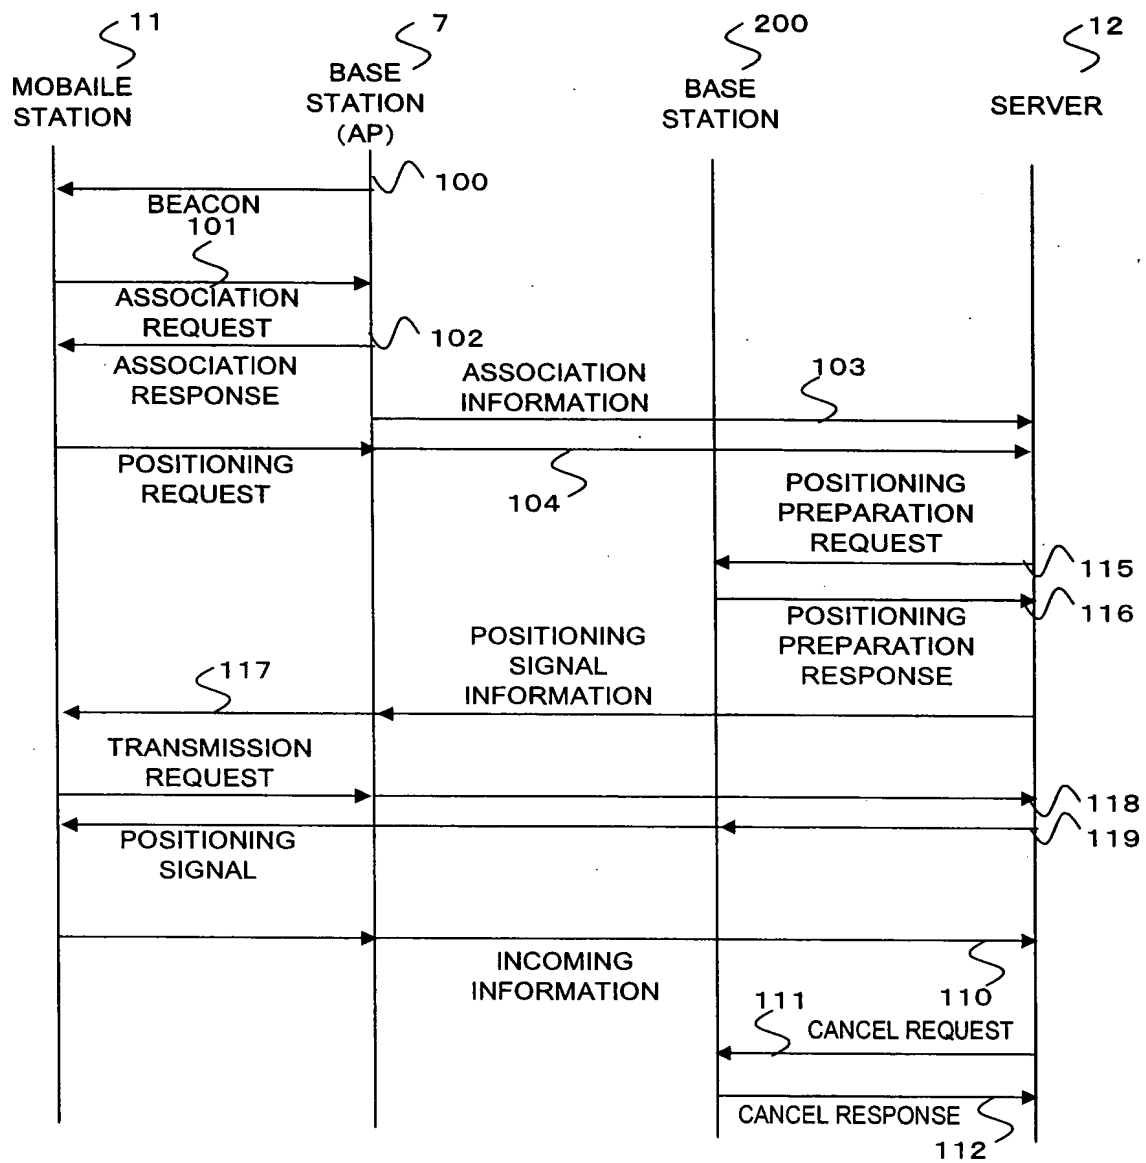

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.